





DESCRIPTION

Roll-formed top starter panel for the patented ecFence privacy fence system. Screw-mounts to the posts first, establishing the engagement point from which each ecPanel hooks downward to build the run. The interlocking engagement with the ecPanel conceals all fasteners. Engineered to FBC 2023 HVHZ (ASCE 7-22), PE-sealed. Available in standard ecFence finish colors, for residential and commercial perimeter applications.


DRAWINGS

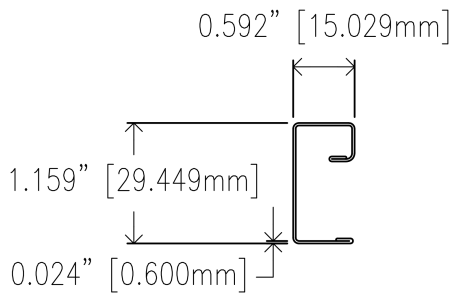

CROSS-SECTION

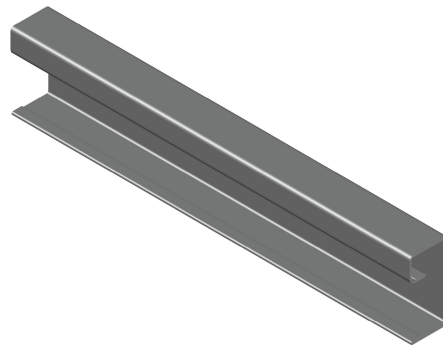

ISOMETRIC — FRONT

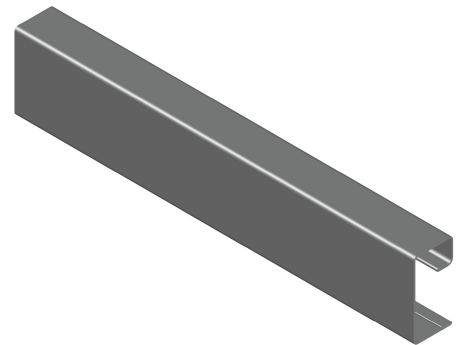

ISOMETRIC — BACK

SPECIFICATIONS

Material	PPGL coil, AZ150 Al-Zn Coating	Total height (uninstalled)	1.159 in (29.4 mm)
Coating, Top	15 micron SMP + 5 micron epoxy primer	Exposed height (installed)	13/32 in (10.3 mm) · nominal 1/2 in (12.7 mm)
Coating, Back	15 micron SMP + 5 micron epoxy primer	Standard length	144 in (3657.6 mm)
Material thickness	0.024 in (0.6 mm)	Field-cut range	1 in (25.4 mm) to 144 in (3657.6 mm)
Weight, per starter	2.87 lb (1.30 kg)	Wind rating (system)	115 / 175 MPH ‡ · Exposure C
Bundling	12 pieces / bundle	Engineering reference	Drawing S-1 (Florida) — 6 ft & 8 ft



PATENTED



DURABLE



ROT-PROOF



TERMITE-PROOF



LOW
MAINTENANCE



PRIVACY



MODERN
LOOK



HIDDEN
FASTENERS



EASY TO
INSTALL



25 YEAR
WARRANTY

FINISH COLORS

PRODUCTION

● Natural Bronze ○ Arctic White

COMING SOON

● Foggy Gray ● Midnight Black

INSTALLATION & FASTENING

FASTENERS

#10 × 3/4 in self-drilling screw — one at each post the starter crosses. 6 ft and under: posts 6 ft o.c. max (3 screws per full 12-ft starter). Over 6 ft to 8 ft: posts 4 ft o.c. max (4 screws per full 12-ft starter).

STANDARD CONFIGURATIONS

Nominal	ecStarter	ecPanels	Actual
4 ft	1	7	44 31/32"
6 ft	1	11	70"
8 ft	1	15	95 1/32"

Per 12 ft fence section.

FIELD CUTTING

Field-cuttable in any direction (length, height, diagonal for grade). Use ferrous-metal-rated tooling: dry-cut chop saw with steel-cutting blade for length cuts; metal-cutting circular saw for height cuts.

STORAGE & HANDLING

Do not store packaged starters outdoors. Repeated sun and rain cycling traps humidity between the packaging materials and the starter's SMP (silicone-modified polyester) paint, which can stain the coating and imprint a surface texture into it. Store indoors or under fully waterproof cover until installation.

‡ Engineered to FBC 2023 HVHZ (ASCE 7-22), PE-sealed. Wind ratings are per fence height: 115 MPH at 6 ft and under; up to 175 MPH over 6 ft to 8 ft. Installations over 6 ft to 8 ft require a 3 in (76.2 mm) × 3 in (76.2 mm) × 10 ga ASTM A500 Gr. B post (specified; supplied by others) set per Drawing S-1 (8 ft). PE-sealed drawings for permitting available from ecFence.